M286 - M287

286.700.6
286.700.6 P7

286.700.6 D
286.700.6 E
286.700.6 F
286.700.6 G

286.700.9

286.700.9 D
286.700.9 F

287.700.12
287.700.12 P7

287.700.12 D
287.700.12 E
287.700.12 F
287.700.12 G

287.700.13

287.700.13 D
287.700.13 F

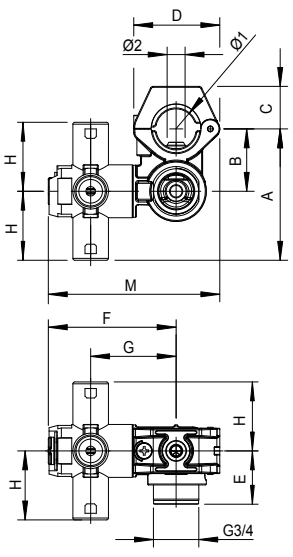

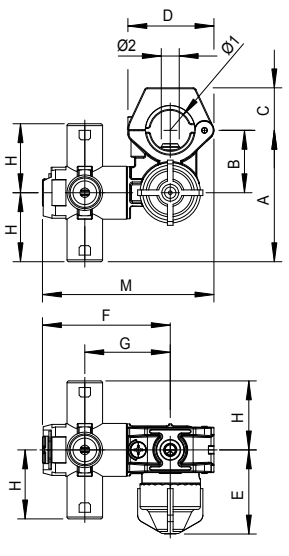

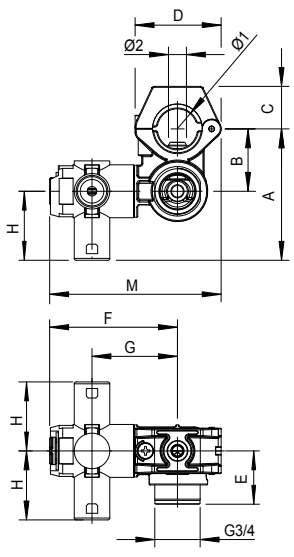

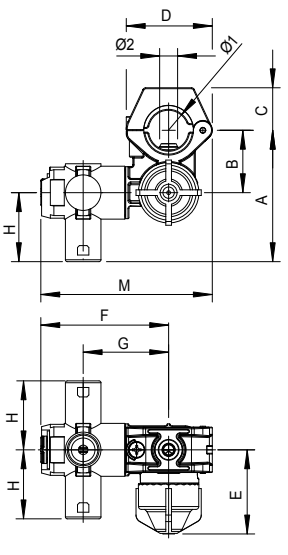

PAGE 36/47

Standard completi di cavallotto e tubetto inox montati, vite autofilettante inox, O Ring
Ghiere ed ugelli non compresi
Cavallotto con sede per vite / dado UNI ISO M6
Versioni: **Senza modulo antigoccia, con filettatura G3/4M. per montaggio sistema di chiusura pneumatico**
Con antigoccia a membrana EPDM
Con antigoccia a membrana FPM
Per tubo Ø1/2" (Ø21.3 e Ø22 mm)
Per tubo Ø3/4"
Attacco Ø7 e Ø9.5 mm

Pressione di esercizio max.: 15 bar
Apertura antigoccia: 1 bar
Peso: con antigoccia 120 g – senza antigoccia 110 g
Materiali: materiali plastici ad alta resistenza – acciaio inox - tenute in EPDM e FPM
Impiego: su macchine per la protezione delle colture agricole in campo aperto. Dimensioni compatte. Portaugello parallelo al tubo e all'antigoccia. Versioni per il montaggio di sistemi di chiusura pneumatici. Montaggio rapido. Eccellente resistenza alla pressione ed agli urti. Tre / quattro posizioni di lavoro con chiusure intermedie. Tubetto di accoppiamento alla barra in acciaio inox. Modelli con antigoccia tarato in produzione per ottenere uniformità di funzionamento. Disegno del modulo antigoccia e delle membrane ottimizzato per resistere ai colpi d'ariete.

Standard supplied with assembled clamp and s.steel inlet connection, s. steel self tapping screw, O Ring
Caps and spray tips not included
Clamp with seat for ISO M6 nut / screw
Models: ***Without check valve unit, 3/4"BSPM. threaded for pneumatic shut off system***
Check valve with EPDM diaphragm
Check valve with FKM diaphragm
Ø1/2" pipes (Ø21.3 and Ø22 mm)
Ø3/4" pipes
Ø7 and Ø9.5 mm pipe connection

Max. operating pressure: 15 bar (218 psi)
Check valve opens at: 1 bar (14.5 psi)
Weight: with check valve 120 g (42 oz) – without check valve 110 g (39 oz)
Materials: *high resistance plastic materials – stainless steel – EPDM and FKM seals*
Use: *for agriculture use on crop sprayers. Very compact. Spray tips holder parallel to pipe and check valve. Models ready to assemble pneumatic shut off systems. Easy mounting. Pressure and shock proof. Three / four spraying outlets with shut off between each position. Stainless steel inlet connection. Models with check valve: valve is factory set for even operations. Shock resistant check valve to stand water hammers and heavy duty applications.*

M286 (4 UGELLI / *SPRAY TIPS*) - COME SI ORDINA / *HOW TO ORDER*

CODICE *code*	MEMBRANA *diaphragm*	Ø1 mm	Ø2 mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm		KIT RICAMBIO *spare parts kit*
286.700.6	-	1/2"	Ø9.5	69.5	33	22.5	45.5	28.2	67.5	45	36.5	10	280.302.34
286.700.6 D	EPDM		Ø9.5					44.5					
286.700.6 E	EPDM		Ø7					44.5					
286.700.6 F	FPM - FKM		Ø9.5					44.5					
286.700.6 G	FPM - FKM		Ø7					44.5					
286.700.6 P7	-		Ø7					28.2					
286.700.9	-	3/4"	Ø9.5	69.5	33	22.5	45.5	28.2	67.5	45	36.5	10	280.302.34
286.700.9 D	EPDM							44.5					
286.700.9 F	FPM - FKM							44.5					

M287 (3 UGELLI / *SPRAY TIPS*) - COME SI ORDINA / *HOW TO ORDER*

CODICE *code*	MEMBRANA *diaphragm*	Ø1 mm	Ø2 mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm		KIT RICAMBIO *spare parts kit*
287.700.12	-	1/2"	Ø9.5	69.5	33	22.5	45.5	28.2	67.5	45	36.5	10	280.302.34
287.700.12 D	EPDM		Ø9.5					44.5					
287.700.12 E	EPDM		Ø7					44.5					
287.700.12 F	FPM - FKM		Ø9.5					44.5					
287.700.12 G	FPM - FKM		Ø7					44.5					
287.700.12 P7	-		Ø7					28.2					
287.700.13	-	3/4"	Ø9.5	69.5	33	22.5	45.5	28.2	67.5	45	36.5	10	280.302.34
287.700.13 D	EPDM							44.5					
287.700.13 F	FPM - FKM							44.5					

RICAMBI *SPARE PARTS :* 286.700.6 286.700.9

RICAMBI *SPARE PARTS :* 287.700.12 287.700.13